


Wiring

Single Wiring

Connect a single set of cables to the terminals on the back of your speaker. It is perfectly acceptable to connect to the top, bottom terminals or even diagonally (experimentation is advisable to achieve the preferred results).



NOTE: When using this method you must KEEP the terminal links in place.

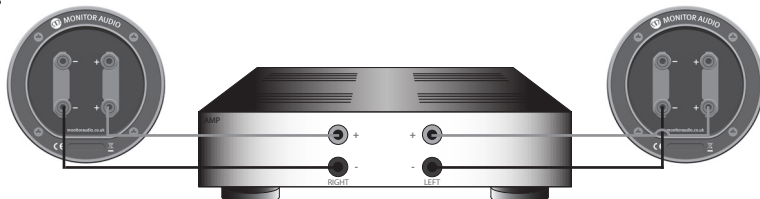


Bi-Wiring

This method can be carried out with the Bronze 2, 5 and 6 speakers. Connect two sets of cables to the top and bottom terminals (positive to positive and negative to negative) from single output of your amplifier.



NOTE: When using this method the terminal links MUST be REMOVED.

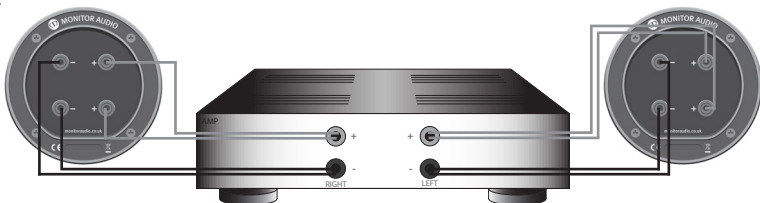

Bi-Amping

This method can be carried out with the Bronze Series 2, 5 and 6 speakers. Connect a set of cables to the top terminals from one amplifier and the bottom set on the second amplifier.



NOTE: When wiring this method the terminal links MUST be REMOVED.

